



LED CEILING LIGHT


✓ Applications

Lighting of an office
Industrial building
Hospital

» Features and Benefits

1. Uniform distributed LEDs to give soothing light output
2. CRI >80
3. Long Life 50000 Hrs.
4. Sleek designed fixture

LED CEILING LIGHT

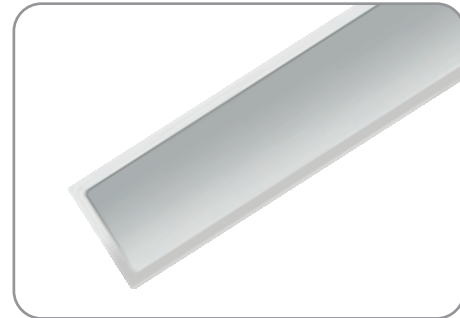

General Specifications	
Product Description	LED CEILING LIGHT
Color Rendering Index (Ra)	>80
Driver Input Voltage	130VAC - 270VAC
Housing	WHITE POWDER COATED CRCA SHEET
LED Efficacy	>110 lm/W
LED Make	OSRAM / NICHIA
Life Span	Rated 50,000 Hrs
Power factor	>0.9
Rated Input Frequency	50Hz
Storage Temperature	-10°C to 65°C
System Efficiency	>80%
Application	Indoor
Working Temperature	-10°C to 50°C

*More Technical details available on request.

Product Description	Product Code	Aesthetic	Power Rating	CCT range	Dimensions	Beam Angle
LED 1x4 CEILING LIGHT 48CW	BLCLNZ048ACW5	White Diffused	48W	5600K-6500K	295mm x 1195mm	120°
LED 1x4 CEILING LIGHT 48CW	BLCLNZ048BCW6	Prismatic	48W	5600K-6500K	295mm x 1195mm	120°
LED 2x2 CEILING LIGHT 48CW	BLCLNZ048ACW1	White Diffused	48W	5600K-6500K	595mm x 595mm	120°
LED 2x2 CEILING LIGHT 36CW	BLCLOZ036ACW1	White Diffused	36W	5600K-6500K	595mm x 595mm	120°



Head Office:

BIRLA LED

VINDHYA TELELINKS LIMITED

Sharda Terraces, 9th & 10th Floor, Plot No.:65,
Sector-11, CBD Belapur, Navi Mumbai-400 614,
Maharashtra, India

Tel : +91 22 41268855/ 27560463/ 64,

Fax : +91 22 41268899

Email : info@vtlrewa.com

www.vtlrewa.com/leddivision.html

Branch Offices:

New Delhi : +91 11 45538800

Bangalore : +91 80 23612484/ 9981

Chennai : +91 44 23746623/ 24

Hyderabad : +91 40 23550183/ 608218

Kolkata : +91 33 22805043/ 44

Goa : +91 832 2782613/ 2829

Bhopal : +91 755 2551183/ 4220313

Vadodara : +91 265 2791794/ 5642